



L&L SEAL  
HEAT-ACTIVATED SEALANTS

**Lightweight, High-  
Performance Engineered  
Solutions for Sealing.**

L&L Seal Heat-Activated Sealants are used for filling and sealing complex cavities to prevent the intrusion of water, air, dust, and fumes and to improve acoustic performance.

[lproducts.com](http://lproducts.com)

**L&L SEAL HEAT-ACTIVATED SEALANTS**

**Filling & Sealing Complex Cavities.**

L&L Seal Heat-Activated Sealant materials are applied prior to the E-coat process, foaming and curing in the E-coat oven to fill and seal cavities in automobile frames.

Offered in multiple forms, our lightweight Heat-Activated Sealants are engineered to meet specific customer needs such as activation under various time-temperature profiles, adhesion to different substrates, and resistance to certain environmental exposure conditions



**The sealant material foams and cures in the E-coat oven.**

**KEY PRODUCT ATTRIBUTES**



**SUPERIOR ADHESION**

- Seals and protects from rust and corrosion
- Prevents intrusion of water, dust, gases, noise, and fumes



**DESIGN FLEXIBILITY**


- Gap jumping capabilities to bridge varying design gaps
- Suitable for large and small cavities



**PROCESS OPTIMIZATION**

- Ideal for temporary fixation prior to heat activation
- Easy integration into OEM assembly processes

**APPLICATIONS**

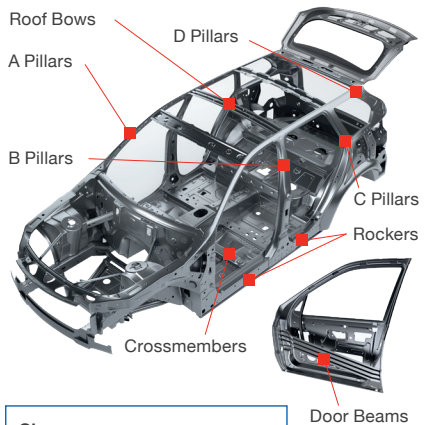

- Closures**
- Doors
  - Liftgates
  - Hoods
  - DrainPlugs
  - Hole Covers

**CUSTOM-ENGINEERED SOLUTIONS**



Tapes



Co-Extruded Parts



Injection Molded Parts



Die-Cut/ Assembled Parts



eXtrude-In-Place™ (XIP™) Sealants

